



Distributed by :

SPS BUILDING

ROOFING & BUILDING PRODUCTS

16A Parkhead Place, Rosedale, Auckland
P 09 415 2669 email: info@spsbuilding.co.nz



It takes more than just shingles to protect your home. It takes

TOTAL PROTECTION ROOFING SYSTEM™ (TPRS)

an integrated system of components and layers designed to withstand the forces of nature outside while controlling temperature and humidity inside. The Owens Corning® Total Protection Roofing System™ gives you the assurance that all of your Owens Corning® roofing components are working together to help increase the performance of your roof – and to enhance the comfort and enjoyment of those who live beneath it.

SEAL.

HELPS CREATE A WATER-PROOF BARRIER

- Ice & Water Barrier
- Synthetic Underlayment

DEFEND.

HELPS PROTECT AGAINST NATURE'S ELEMENTS

- Starter Shingles
- Shingles
- Hip & Ridge Shingles


BREATHE.

FOR BALANCED ATTIC VENTILATION

- Intake Vents
- Exhaust Vents

COMFORT.

Add comfort and energy performance with proper attic insulation.

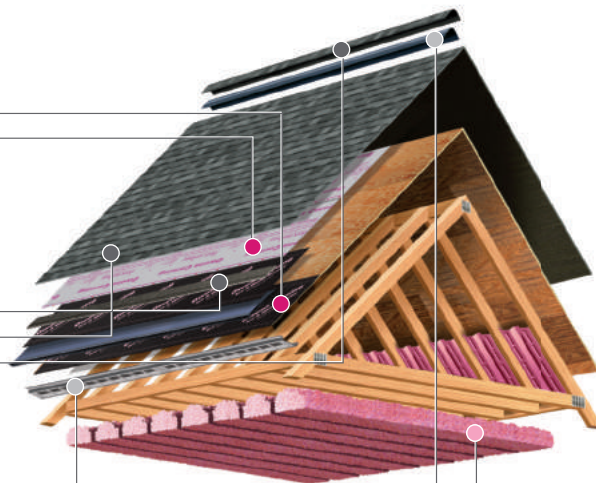

SUREGUARD™ Synthetic Ice & Water Barrier
with Slip-Resistant SureFoot™ Technology



Water Protection Snow & Ice Protection UV Protection



SEAL.


Safe, Strong, SUREGUARD™

Introducing **SUREGUARD™**


SUREGUARD™ is NEW, Innovative, light-weight high performance 'synthetic ice & water barrier' with slip-resistance **SureFoot™** Technology for use under all major roof covering materials introduced by global leading building materials company, Owens Corning.



Product Composition

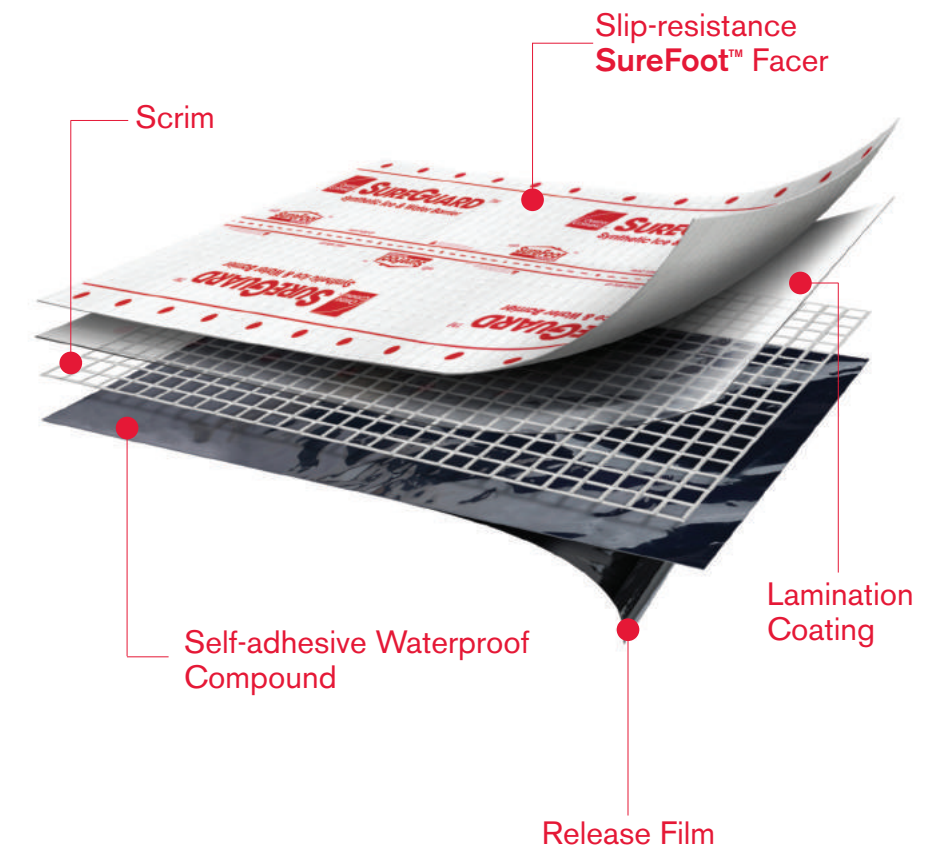

Owens Corning's patented **SureFoot™** Technology was developed to provide excellent walkability and slip resistance during installation for fast and consistent installation.

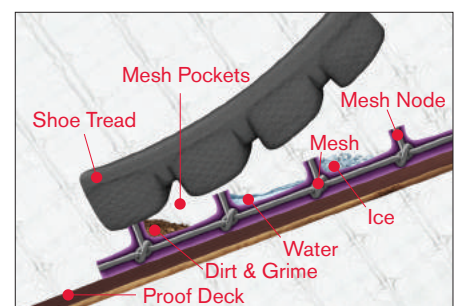

Ice Damming
Continual thawing and refreezing of melting snow or the backup of frozen slush in gutters can cause water leakage.



Wind-Driven Rain
Hard, wind-driven rain can cause backup in gutters and drains.



OWENS CORNING BM (KOREA), LTD
18TH FLOOR, WEWORK BUILDING, 507 TEHERAN-RO
GANGNAM-GU, SEOUL, KOREA 06168
TEL 822.2050.7490 FAX 822.2050.7499
www.owenscorning.co.kr

Pub. No. 655721715. Printed in Seoul, Korea. November. 2017.
THE PINK PANTHER™ & © 1964-2017 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved.
The color PINK is a registered trademark of Owens Corning. © 2017 Owens Corning. All Rights Reserved.
*See actual warranty for complete details, limitations and requirements. A longer limited warranty term applies when SUREGUARD™ Synthetic Ice & Water Barrier is used in conjunction with Owens Corning™ Roofing shingles. 30-Years for non-asphalts shingles, 10-years for non-OC shingles.
†Special application required for extended exposure. See installation instructions.
‡2016 Roofing Homeowner Brand Awareness Survey by Owens Corning.
§All values are approximate.
¶Excluded non-Owens Corning Roofing products such as flashing, fasteners and wood decking.



TOTAL PROTECTION. TOTAL CONFIDENCE.™





Choose the Synthetic Strength of SUREGUARD™ with SureFoot™ Technology

SUREGUARD™ ice & water barrier is specially designed to act as an additional line of protection against damage. Our patented slip-resistant surface ensures excellent traction and safe installation, and up-to 90 days UV exposure¹ and a Lifetime limited warranty* SUREGUARD™ provides even more benefits for contractors. Delivering the performance you expect from Owens Corning, and beyond.

Safe. Protected. Home.



Strong for the roof. Safe for your crew.

SUREGUARD™ synthetic ice & water barrier with SureFoot™ Technology

Premium roof protection for use under all : metal, tile, slate, shake & shingle roofing




Slip-resistance Surefoot™ Technology

SEAL.

Safe, Strong, SUREGUARD™



Installs quickly and easily

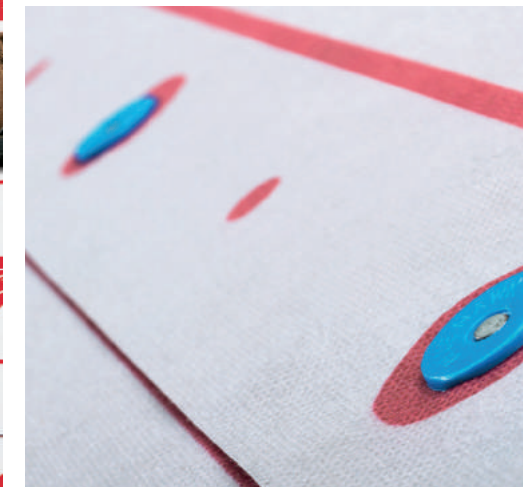

Resists stretching and tearing



Repels moisture

SUREGUARD™ synthetic ice & water barrier Owens Corning, the most trusted roofing brand².



SUREGUARD™ ATTRIBUTES

Warranty Length Limited Lifetime*

Application For use under all major roof covering materials

SUREGUARD™ PRODUCT SPECIFICATION³

Length Per Roll 10m

Width per Roll 1m

Coverage per Roll 10m²

Weight per Roll 10kg

Rolls per Pallet 60

SUREGUARD™ TECHNICAL DATA

Test & Properties Standards and Codes

Nail Sealability ASTM D1970

Tensile Strength ASTM D1970

Adhesion to Plywood ASTM D1970

SUREGUARD™ synthetic ice & water barrier by Owens Corning³

Performance Feature	SureGuard™ Synthetic Ice & Water Barrier	Conventional Non-woven underlayment
Moisture Resistance	Synthetic facer repels and sheds water ✓	Absorbs water
Enhanced slip resistance	Patented SureFoot™ technology ✓	None
Enhanced tear resistance	Passed ✓	May tear during installation
Nail Sealability	Passed ✓	FAIL
Lightweight	10kg/roll ✓	12.5kg/roll
Longer UV exposure	Can be left exposed for up to 90 days ¹ ✓	Must be covered immediately
Easier Installation	Clearly marked fastening guides with lines ✓	Guidelines only
Warranty coverage	Lifetime limited warranty* ✓	None

